

DH-HAC-HFW1400B

4MP HDCVI IR Bullet Camera

HDCVI



- · Max 30fps@4MP
- · HD and SD output switchable
- · 3.6mm fixed lens (6mm, 8mm optional)
- · Max. IR length 50m, Smart IR
- · IP67, DC12V













System Overview

Experience superior 4MP video and the simplicity of reusing existing coaxial infrastructure with HDCVI. The Lite series 4MP HDCVI camera features a compact design and offers a high quality image with rich details at a friendly price. It offers various vari-focal/fixed lens models with a multi-language OSD and HD/SD switchable output. Its structural flexibility and high cost-performance makes the camera an ideal choice for SMB solutions.

Functions

4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals to be transmitted over 1 coaxial cable simultaneously, i.e. video, audio*, data and power. Dual-way data transmission allows the HDCVI camera to interact with the HCVR, such as sending control signal or triggering alarm. Moreover, HDCVI technology supports PoC for construction flexibility.

* Audio input is available for some models of HDCVI cameras.

Long Distance Transmission

HDCVI technology guarantees long-distance and real-time transmission without any loss. It supports up to 700m for 4MP HD video via coaxial cable, and up to 300m via UTP cable.*

*Actual results verified by real-scene testing in Dahua's test laboratory.

Simplicity

HDCVI technology inherits the born feature of simplicity from traditional analog surveillance system, making itself a best choice for investment protection. HDCVI system can seamlessly upgrade the traditional analog system without replacing existing coaxial cabling. The plug and play approach enables full HD video surveillance without the hassle of configuring a network.

Smart IR

The camera is designed with array LED IR illumination for best lowlight performance. Smart IR is a technology to ensure brightness uniformity in B/W image under low illumination. Dahua's unique Smart IR adjusts to the intensity of camera's infrared LEDs to compensate for the distance of an object, and prevents IR LEDs from overexposing images as the object come closer to the camera.

HD/SD Switchable

The camera supports switchable HDCVI high definition video output and CVBS standard definition video output. The two formats can be switched over through OSD menu or by PFM820(UTC controller). This feature makes the camera to be compatible with both HCVRs and existing analog DVRs and also facilitates debugging through analog testers.

Multi-language OSD

OSD menu provides multiple image adjustments and function settings to meet the requirements of different monitoring scenes. The OSD menu includes configurations such as backlight mode, day/night, white balance, privacy mask and motion detect. The camera supports 11 languages for OSD menu, namely, Chinese, English, French, German, Spanish, Portuguese, Italian, Japanese, Korean, Russian and Polish.

Protection

The camera's outstanding reliability is unsurpassed due to its rugged design. The camera is protected against water and dust with IP67 ranking, making it suitable for indoor or outdoor environments.

With working temperature range of-40 $^{\circ}$ C to +60 $^{\circ}$ C (-40 $^{\circ}$ F to +140 $^{\circ}$ F), the camera is designed for extreme temperature environments.

Supporting ±25% input voltage tolerance, this camera suits even the most unstable power supply conditions. Its 4KV lightning rating provides protection against the camera and its structure from the effects of lightning.

Lite Series | DH-HAC-HFW1400B

Technical Specification	
Camera	
Image Sensor	1/3" CMOS
Effective Pixels	2688(H)×1520(V), 4.1MP
Scanning System	Progressive
Electronic Shutter Speed	PAL: 1/25~1/100000s NTSC: 1/30~1/100000s
Minimum Illumination	0.03Lux/F2.0, 30IRE, 0Lux IR on
S/N Ratio	More than 65dB
IR Distance	Up to 50m (164feet)
IR On/Off Control	Auto / Manual
IR LEDs	1
Lens	
Lens Type	Fixed lens / Fixed iris
Mount Type	Board-in
Focal Length	3.6mm (6mm, 8mm Optional)
Max Aperture	F2.0
Angle of View	H: 84.8° (52.5°/32.9°)
Focus Control	N/A
Close Focus Distance	1100mm (2200mm/4000mm) 43.3" (86.6"/157.5")
DODI Distance	

DORI Distance

Note: The DORI distance is a "general proximity" of distance which makes it easy to pinpoint the right camera for your needs. The DORI distance is calculated based on sensor specification and lab test result according to EN 62676-4 which defines the criteria for Detect, Observe, Recognize and Identify respectively.

	DORI Definition	Distance
Detect	25px/m (8px/ft)	3.6mm: 80m(262ft) 6mm: 117m(385ft) 8mm: 161m(527ft)
Observe	63px/m (19px/ft)	3.6mm: 32m(105ft) 6mm: 47m(154ft) 8mm: 64m(210ft)
Recognize	125px/m (38px/ft)	3.6mm: 16m(53ft) 6mm: 23m(77ft) 8mm: 32m(105ft)
Identify	250ppm (76px/ft)	3.6mm: 8m(26ft) 6mm: 12m(39ft) 8mm: 16m(53ft)

Pan / Tilt / Rotation

Pan/Tilt/Rotation	Pan: 0° ~ 360° Tilt: 0° ~ 87°
	Rotation: 0° ~ 360°

Video

Resolution	4MP (2560×1440)
Frame Rate	25/30fps@4MP, 25/30fps@1080P, 25/30fps@720P
Video Output	1-channel BNC high definition video output / CVBS video output (Can switch)

Day/Night	Auto (ICR) / Manual				
OSD Menu	Multi-language				
BLC Mode	BLC / HLC / DWDR				
WDR	DWDR				
Gain Control	AGC				
Noise Reduction	2D				
White Balance	Auto / Manual				
Smart IR	Auto / Manual				

Certifications

CE (EN55032, EN55024, EN50130-4) FCC (CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014) UL (UL60950-1+CAN/CSA C22.2 No.60950-1)
,

Interface

Audio Interface	N/A

Eelectrical

Power Supply	12V DC ±25%
Power Consumption	Max 4.1W (12V DC, IR on)

Environmental

Operating Conditions	-40°C $^{\sim}$ +60°C (-40°F $^{\sim}$ +140°F) / Less than 90% RH * Start up should be done at above-40°C (-40°F)
Storage Conditions	-40°C ~ +60°C (-40°F ~ +140°F) / Less than 90% RH
Ingress Protection & Vandal Resistance	IP67

Construction

Casing	Aluminium
Dimensions	241.8mm×90.4mm×90.4mm (9.52"×3.56"×3.56")
Net Weight	0.58kg (1.28lb)
Gross Weight	0.71kg (1.57lb)

Lite Series | DH-HAC-HFW1400B

Ordering Info	ormation		
Туре	Part Number	Description	
	DH-HAC-HFW1400BP 3.6mm		
	DH-HAC-HFW1400BP 6mm	4MP HDCVI IR Bullet Camera, PAL	
4MP Camera	DH-HAC-HFW1400BP 8mm		
4IVIP Calliera	DH-HAC-HFW1400BN 3.6mm		
	DH-HAC-HFW1400BN 6mm	4MP HDCVI IR Bullet Camera, NTSC	
	DH-HAC-HFW1400BN 8mm		
PI Accessories	PFA130-E	Junction box (For use alone or with PFA152-E pole mount)	
	PFA152-E	Pole mount (For use with PFA130-E junction box)	
	PFM800-E	Passive HDCVI Balun	
	PFM800-4MP	Passive HDCVI Balun	
	PFM801-4MP	Passive HDCVI Balun with Power	
	PFM321	12V 1A Power Adapter	
	PFM320D-015	12V 1.5A Power Adapter	

Αı	~	00	_	ri	0	C

Optional:



PFA130-E Junction box



PFA152-E Pole mount



Passive HDCVI Balun




PFM800-4MP Passive HDCVI Balun



PFM801-4MP Passive HDCVI Balun With Power



PFM321 12V 1A Power Adapter

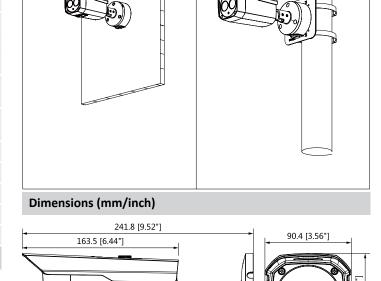

Pole Mount

PFB130-E + PFA152-E

Junction Mount

PFA130-E



PFM320D-015 Power Adapter

